baby monitor SBC SC468

Instructions for use **English 4**

Instructions pour l'utilisation Français 10

Modo de empleo **Español 16**

Bedienungsanleitung **Deutsch** 22

Gebruiksaanwijzing Nederlands 28

Istruzioni per l'uso Italiano 34

Instruções de uso **Português 40**

Οδηγίες χρήσης **Ελληνικά 46**

Bruksanvisning **Svenska** 52

Vejledning **Dansk 58**

Bruksanvisning Norsk 64

Käyttöohje **Suomi 70**



☆ Helpline www.p4c.philips.com

België/Belgien/Belgique

070 222 303

Danmark

808 82814

Deutschland

0180 535 6767

España

902 113 384

France

0825 889789

Έλληνας

0 0800 3122 1280

Ireland

0176 40292

Italia

199 11 88 99

Nederland

0900-8406

Norge

47-22-748 000

Österreich

0810 001 203

Portugal

351 21 416 3333

Schweiz/ Suisse/ Svizzera

0844 800 544

Suomi

09 6158 0250

Sverige

08 5985 2250


UK (United Kingdom)


0870 900 9070

SBC SC468/00/84

BE 🗸				
IRE	IT 🗸	LU 🗸	NL 🗸	AT 🗸
PT 🗸			UK	NOV
DE 🗸	CH 🗸			



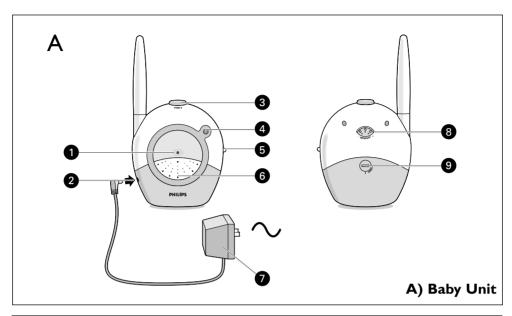

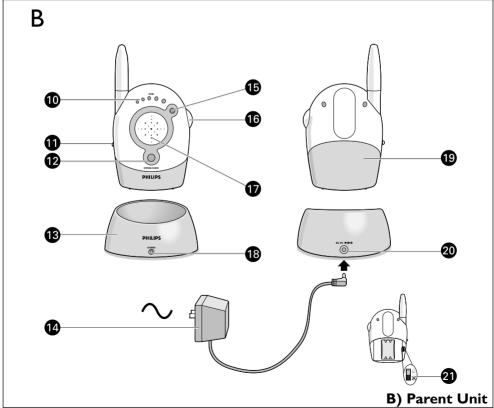

4 ENGLISH

Your baby monitor

SBC SC468

Philips is dedicated to producing caring, reliable products that new moms and dads really need. Products whose reliability and operating quality bring reassurance.

Product illustration on inside flap:

A Baby unit

- 1 night light
- 2 DC power supply socket
- 3 power button
- 4 power light
- 5 channel selection switch
- 6 microphone
- 7 AC power adapter
- 8 microphone sensitivity control
- 9 battery compartment cover

B Parent unit


- 10 sound-level lights
- 11 channel selection switch
- 12 system check light
- 13 charging base
- 14 AC power adapter
- 15 power light
- 16 volume control on/off switch
- 17 loudspeaker
- 18 charging light
- 19 battery compartment cover
- 20 DC power supply socket
- 21 system check alarm switch

Important information

Please read this guide carefully before using the baby monitor, and keep it for future reference. This baby monitor is intended as an aid. It is not a substitute for responsible and proper adult supervision and should not be used as such.

- Make sure the Baby Unit and adapter cable are always out of reach of the baby, at least one metre away.
- Never place the Baby Unit inside the baby 's bed or playpen!
- Never cover the baby monitor (with a towel, blanket, etc.).
- Clean the baby monitor with a damp cloth.
- · Never use the baby monitor near water.
- Radio equipment for wireless applications is not protected against disturbance from other radio services.


Getting your baby monitor ready











- 1 Position the Baby unit at least one metre away from your baby. Never place the baby unit inside the baby's bed or playpen.
- 2 Set channel selection switches to the same channel on both units.
- 3 Connect the power adapter to Baby unit socket.
- 4 Plug the power adapter into mains supply.
- 5 Move away from the Baby unit with the Parent unit. If units are positioned too close to each other then a high-pitched noise can be heard
- **6** Connect the second power adapter to the Parent unit's charging base
- 7 Plug the second power adapter into a mains supply.
- 8 Place the Parent unit inside its charging base. > The red charging light lights.
- **9** Leave the Parent unit in charging base for at least 14 hours to fully charge the batteries.


When batteries are fully charged, the Parent unit can be used cordlessly for up to 12 hours.

10 Place the Parent unit inside the charging base when power light on the Parent unit flashes green (an indication that batteries are low).

6 ENGLISH

Using your baby monitor

Listening to your baby



> The power light lights (green).




2 Adjust the microphone sensitivity of the Baby unit to a level you prefer (using your own voice as a sound reference).



3 Switch the Parent unit on and adjust the volume to level you prefer using the VOLUME ON/OFF control.

The digital SYSTEM CHECK light lights continuously (green) when the Parent unit and Baby unit are in touch with each other:


Features explanation













Avoiding interference

If there is interference or if sound reception is poor, switch both units to another channel.

Always make sure that the channel selection switches on both units are set to the same position.

Monitoring baby silently

Adjust the volume on the Parent unit to the lowest level using the VOLUME ON/OFF control (do not switch off).

> the sound-level lights visually alert you to baby's sounds. The more sound your baby makes, the more lights light.

Checking that the units are in touch

Check that the digital SYSTEM CHECK light on the Parent unit lights continuously (green) to confirm that the connection between both units is reliable.

If the light flashes (green), move the Parent unit closer to the Baby unit. The light flashes if the units are out of range for more than 30 seconds or if there is interference.

Switching on the system check alarm

You can switch on the system check alarm on the Parent unit that beeps when the units are not in touch. The Parent unit is delivered with the system check alarm switched off.

- 1 Open the Parent unit's battery compartment cover.
- **2** Set the switch inside compartment to the ON position (\bigcirc) .
- 3 Close battery compartment cover.

The SYSTEM CHECK light can still flash even if the system check alarm is switched off.

Switching on the night light

Push the Baby unit night light to switch it on and off.

> Switch off the night light when operating the Baby unit on batteries to conserve power.

Range 200m in open air


The baby monitor has an operating range of up to 200 metres in ideal open-air conditions. This means that the units can see each other with no obstacles in between. Walls, ceilings, large objects and even glass affect the operating range. The more obstacles there are in between, the shorter the operating range.

ENGLISH

Using batteries

Operating the Baby unit cordlessly

1 Remove the battery compartment cover using a coin.



Batteries not included; we recommend non-chargeable Philips Alkaline

3 Put the cover back in place and secure using a coin.

> If the power light flashes (red) install new batteries.

The unit operates for up to 30 hours on batteries.

Replacing the Parent unit's battery pack

- 1 Open the Parent unit's battery compartment cover.
- **2** Disconnect the old battery pack from the power plug and remove.
- **3** Carefully connect the new battery pack to the power plug and place inside the battery compartment.
- 4 Close battery compartment cover. Remove the battery-pack from the Parent unit if it is not used for long periods.

Batteries

Dispose of used batteries in an environmentally friendly manner.

Do not mix old and new batteries, or different types of batteries. Remove Baby unit batteries if the baby monitor is not to be used for long periods.

Technical specifications

Power supply:


- Battery pack; rechargeable NiMH for Parent unit (included).
- Optional batteries 4 x 1.5V; AA alkaline for Baby unit (not included).
- AC power adapter 230V AC, 50 Hz (two included): Output voltage 9V DC, 200mA.
- Only use the AC power adapter included.
- Up to 200 metres in ideal conditions (walls, floors, etc. can limit this distance).
- 10°C to 40°C.
- · Continuous communication link (hidden signal helps reduce interference and ensures a continuous link between both units so you only hear your baby's sounds).


SBC SC468/00:

from 40.695 to 40.675 MHz

Operating range: Operating temperature: Digital Pilot tone:

Transmission frequencies:









	Problem solving				
Problem	Possible cause	Solution			
Power light does not light	Parent unit: unit is not turned on.	Turn VOLUME ON/OFF control downwards.			
	Batteries are low.	Recharge batteries.			
	Baby unit: unit is not turned on.	Push power button.			
	Power adapter is not plugged in or batteries are exhausted.	Plug in power adapter or replace batteries.			
High pitched noise	Units are too close together.	Move parent unit away from baby unit. Turn VOLUME ON/OFF control on parent unit upwards.			
Parent Unit batteries do not charge	Battery life is at an end.	Connect charging base to mains, power. Replace battery pack.			
No sound	Volume on Parent Unit is set too low.	Turn VOLUME ON/OFF control downwards.			
Power light flashing Batteries are low or empty.		Parent unit: - recharge battery pack. Baby unit: - replace batteries or connect to mains power:			
Interference or poor reception	Mobile or cordless phones too close. to the baby monitor.	Move phones away from the units.			
Pick-up from another baby monitor	Both systems are operating on the same frequency.	Switch channels.			
System check light flashing (green) / System check alarm	Units are out of range or there is interference from another FM source.	Move units closer together to restore the link. Remove the other FM source.			
	Baby unit is not switched on.	Push power button.			

Hereby, Philips Consumer Electronics, B.U. Peripherals & Accessories, declares that this SBC SC468 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Guarantuee certificate Garantiebewijs Certificado de garantia Garantibevis

Certificat de garantie Certificado de garantia Εγγύηση Garantibevis

Garantieschein Certificato di garanzia Garanticertifikat Takuutodistus



year warranty année garantie Jahr Garantie jaar garantie año garantia anno garanzia χρόνσς εγγύηση år garanti år garanti år garanti vuosi takuu año garantia

Туре:	SBC SC468		
Serial nr	:		

Date of purchase - Date de la vente - Verkaufsdatum - Aankoopdatum - Fecha de compra - Date d'acquisito - Data da adquirição - Ημερομηνία αγοράς - Inköpsdatum - Anskaffelsesdato - Kjøpedato - Oatopäivä -

Dealer's name, address and signature Nom, adresse et signature du revendeur Name, Anschrift und Unterschrift des Händlers Namn, adres en handtekening v.d. handelaar Nombre, direccion y firma del distribudor Nome, indirizzo e firma del fornitore Ονοματεπώνμο, διεύθυνση και υπογραφή του εμπ. προμηθευτη Återförsäljarens namn, adress och signatur Forhandlerens navn, adresse og unterskrift Forhandlerens navn, adresse og unterskrift Jälleenmyyjän nimi, osoite ja allekirjoitus Nome, morada e assinature da loja

6 month guarantee on rechargeable batteries 6 mois de garantie sur les piles rechargeables 6 meses de garantia para las pilas recargables 6 Monate Garantie auf wiederaufladbare Batterien 6 maanden garantie op oplaadbare batterijen Garanzia di 6 mesi sulle batterie ricaricabili Pilhas recarregáveis com 6 meses de garantia Εγγύηση 6 μηνών σε επαναφορτιξόμενες μπαταρίες 6 månaders garanti på laddningsbara batterier 6 måneders garanti på genopladelige batterier 6 måneders garanti på de oppladbare batteriene Ladattavilla akuilla on 6 kuukauden takuu

www.philips.com

This document is printed on chlorine free produced paper Data subject to change without notice Printed in China C€0682 ©

